

Assessment of sustainability indicators for renewable energy technologies

Annette Evans, Vladimir Strežov^{*}, Tim J. Evans

Graduate School of the Environment, Macquarie University, Sydney, NSW 2109, Australia

ARTICLE INFO

Article history:

Received 11 March 2008

Accepted 25 March 2008

Keywords:

Renewable energy

Sustainability

Emissions

Price

Social impacts

ABSTRACT

The non-combustion based renewable electricity generation technologies were assessed against a range of sustainability indicators and using data obtained from the literature. The indicators used to assess each technology were price of generated electricity, greenhouse gas emissions during full life cycle of the technology, availability of renewable sources, efficiency of energy conversion, land requirements, water consumption and social impacts. The cost of electricity, greenhouse gas emissions and the efficiency of electricity generation were found to have a very wide range for each technology, mainly due to variations in technological options as well as geographical dependence of each renewable energy source. The social impacts were assessed qualitatively based on the major individual impacts discussed in literature. Renewable energy technologies were then ranked against each indicator assuming that indicators have equal importance for sustainable development. It was found that wind power is the most sustainable, followed by hydropower, photovoltaic and then geothermal. Wind power was identified with the lowest relative greenhouse gas emissions, the least water consumption demands and with the most favourable social impacts comparing to other technologies, but requires larger land and has high relative capital costs.

© 2008 Elsevier Ltd. All rights reserved.

Contents

1. Introduction	1082
2. Sustainability indicators of renewable energy technologies	1083
2.1. Price of electricity generation	1083
2.2. Greenhouse gas emissions	1084
2.3. Availability and technological limitations	1084
2.4. Efficiency of energy generation	1085
2.5. Land use	1085
2.6. Water consumption	1085
2.7. Social impacts	1085
2.8. Ranking	1086
3. Conclusions	1086
References	1086

1. Introduction

In 2005 the worldwide electricity generation was 17 450 T W h out of which 40% originated from coal, 20% from gas, 16% from nuclear, 16% hydro, 7% from oil and only 2% from renewable

sources such as geothermal, solar, wind, combustible renewables and waste [1]. The current fuel mix has fossil and nuclear fuels contributing to nearly 70% of total generation. Coal is known to have the highest carbon dioxide emissions per kW h, as well as emitting other pollutants at high levels. Still, it continues to dominate the market due to its low cost and high availability, while at the same time challenging the principles of sustainability. If significant efforts are not made to reduce the amount of emissions produced, the number of coal fired power stations will continue to

^{*} Corresponding author. Tel.: +61 2 9850 6959; fax: +61 2 9850 7972.

E-mail address: vstrežov@gse.mq.edu.au (V. Strežov).

rise and in developing countries alone will produce more CO₂ than the entire OECD power sector for the year 2030 [2].

In order to direct future investment, it is necessary to understand the environmental footprint of projected energy growth scenarios, focusing on sustainable energy generation practices. The full environmental footprint accounts for the entire energy chain lifecycle, from mining and processing to direct and indirect emissions, waste disposal and/or recycling. In the assessment of each stage of the chain, key indicators must be identified to allow quantification of impact. The indicators will be based upon environmental and societal impacts, greenhouse gas emissions, resource depletion, availability of renewable energy sources and the value that they add to the economy.

Significant research has already been given to understand the impacts of electricity generation to the environment and economy. Most work seeks to quantify parameters such as emissions [3,4], energy payback periods [5] and costs [6]. Several authors have completed full life cycle analysis (LCA) of individual energy generation technologies [7,8]. Life cycle analysis (LCA) is an internationally accepted tool for evaluation of the impact for a product or service. LCA of energy generation technologies allows direct comparison of a range of impacts by breaking them down into relative consequences, i.e. effect of wind power generation on migratory birds [9,10], potential incidence of leukaemia clusters surrounding nuclear power plants [11,12], etc. There are other methods of assessing sustainability, such as input–output analysis, mass and energy balances, emergy (embodied energy) accounting [13], however LCA is a combination of these tools, providing the most comprehensive method currently available.

Life cycle analysis as a tool to assess sustainability is not without its limitations, as identified by Bergerson and Lave [14]. It is the responsibility of the analyst to ensure all necessary inputs and outputs are considered and weighted. Gagnon et al. [15] highlighted the fact that LCAs are unable to account for the dual function of hydroelectric dams or the reliability of electricity supply. As with all analysis methods, there is also difficulty attributing full value to more flexible generation options [16].

The most comprehensive examples of previous LCA studies on electricity generation have been produced by Bilek et al. [3], Hondo [4], Gagnon et al. [15], Denholm and Kulcinski [17], Uchiyama [18] and Weisser [19]. These studies used one or more indicators to provide assessment, typically greenhouse gas emissions and possibly energy accounting. Gagnon et al. [15] consider the widest range of indicators of sustainability in their assessment, but avoid consideration of social impacts. The previous studies discuss only small number of indicators and limited variation of energy generation technologies to gain a full understanding of the sustainability of all modern electricity generation technologies.

There is a range of other significantly important indicators that must be considered when evaluating sustainability of energy generation technologies. It is not only the traditional form of the environment that is impacted by electricity generation, the human social and economic environment are also significantly impacted by the choice of production method. The work presented here

seeks to assess and rank the relative sustainability of non-combustion renewable energy technologies, photovoltaic, wind, hydro and geothermal, using data collected from the literature. The key indicators of sustainability used in this assessment with the main justification for their selection are:

- Price of electricity generation unit must be considered since unfavourable economics are not sustainable.
- Greenhouse gas emissions are increasingly becoming one of the key parameters that define sustainability of energy generation.
- Availability and limitations of each technology must be considered since some technologies or fuels may be heavily resource constrained.
- Efficiency of energy transformation must be known for meaningful comparison. Efficient processes will typically have lower process requirements, capital and operating costs. Less efficient processes may have more significant room for technological advancement and innovation.
- Land use requirements are important as renewable energy technologies are often claimed to compete with agriculturally arable land or to change biodiversity.
- Water consumption is particularly important in arid climates such as Australia. It is not sustainable to have high water consumption and evaporation rates to support the energy generation process when already water shortages are problematic. Previous LCAs often ignore the high water requirements of thermal technologies such as coal when it must be considered.
- Social impacts are important to correctly identify and quantify the human risks and consequences will allow better acceptance and understanding of some technologies that are often subject to public objection.

After assessment of selected indicators, the renewable energy technologies were ranked against each other, with each indicator given equal importance.

2. Sustainability indicators of renewable energy technologies

2.1. Price of electricity generation

Average prices for electricity generation for each energy generation technology are shown in Table 1. Each technology offers production of electricity at a very wide range of costs. The range of costs, shown in Fig. 1, were collected from an extensive number of literature sources [2,3,20–63] comprising of a range and an averaged cost of production of electricity over the full life cycle of each energy generation technology accounting for construction, installation/commissioning, operation, maintenance, decommissioning, recycling and/or disposal. The price for electricity generation from coal and gas in Fig. 1 are shown for comparative

Table 1

Mean price of electricity and average greenhouse gas emissions expressed as CO₂ equivalent for individual energy generation technologies

	USD/kW h	g CO ₂ -e/kW h
Photovoltaic	\$0.24	90
Wind	\$0.07	25
Hydro	\$0.05	41
Geothermal	\$0.07	170
Coal	\$0.042	1004
Gas	\$0.048	543

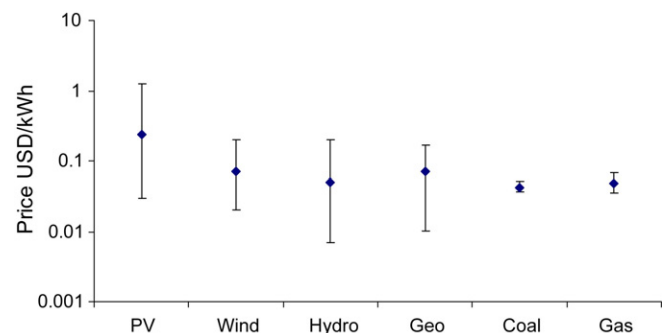


Fig. 1. Cost of electricity generation per kW h.

purpose only. Most figures found in the literature also include interest calculations on capital, but none of them accounts for the cost of transmission, which can add up to 1.5 c/kW h [2] when long transmission lines are necessary. Long distances for transmission are more common with renewables than non-renewables, particularly off-shore wind farms [2]. Intermittent renewables such as photovoltaics and wind may require backup, these have not been included in cost calculations. The upper limit for photovoltaics was cropped for convenience, the highest value found was \$1.25/kW h [59], with no explanation as to why the value is so high. The next greatest value found was from Kannan et al. [44] at \$0.57/kW h, however this was given with an explanation of calculations and assumptions. Photovoltaics have the widest range in prices for electricity generation due to the large range of types of solar cells available, and location specific variations such as the cost of electricity to manufacture the cells and sunlight intensity during operation.

Price profiles for each non-combustion renewable energy technology show high capital intensity and low running costs, due to zero fuel requirements. For photovoltaics, the most significant cost is silicon purification, using 60% of the production energy of a frameless multi-crystalline module [64]. Overall capital costs account for over 95% of the life cycle costs for photovoltaics, meaning that interest rate variations have a large impact on life cycle prices [44]. This would be expected with all other capital-intensive technologies. Wind costs can be minimised by careful selection of suitably sized generators, according to the quality of the site-specific wind resource. Hydro dam construction accounts for nearly all hydro costs, with the low operation, maintenance and refurbishment costs and long plant lifetimes [65]. Geothermal prices are heavily increased by the long project development times, high costs and risk of exploratory drilling [66]. Drilling can account for up to 50% of the total project cost [67].

Wide-ranging values for the price per kW h are seen for all technologies, however the greatest range is for photovoltaics. For each technology, the average value was much closer to the lowest than highest price. Hydro had the lowest average cost, geothermal and wind the same average cost with geothermal exhibiting lower range in price variations. Photovoltaics are by far the most expensive technology.

2.2. Greenhouse gas emissions

Greenhouse gas emissions, shown as grams of CO₂ equivalent (CO_{2-e}) in Fig. 2 were generally estimated according to the full operational life cycle of each renewable energy technology including CO_{2-e} emissions from manufacturing of the plant to full operation of the technology [3–5,8,9,15,18,19,30,33,37,41,42,44,53,59,62,67–97]. The emissions are found to vary widely within each technology. The mean values of CO_{2-e} emissions for each technology are summarised in Table 1. Overall,

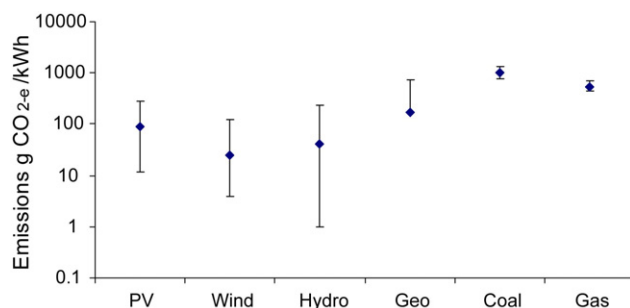


Fig. 2. Carbon dioxide equivalent emissions during electricity generation.

wind has the lowest CO_{2-e} emissions, with only around 25 g/kW h CO_{2-e}. Hydro and photovoltaics also have low emissions, with average reported values at less than 100 g/kW h CO_{2-e}. The average emissions from geothermal are fair at 170 g/kW h, however the range includes all possible values for gas emissions and may even be as high as a low-emitting coal fired power station. For all technologies except hydro, CO_{2-e} emissions account for all significant carbon emissions.

For photovoltaics and wind power most of the emissions are the result of electricity use during manufacturing. In these cases, an average grid mix for the region of manufacture is typically used to calculate emissions. Grid mixes vary widely with location, for example the typical grid mix in Australia in 2005 was 76% coal, 15% natural gas, 2% oil, 6% hydro and 1% non-hydro renewables [98].

In the case of hydroelectricity, cooler climates, lower biomass intensities and dams with higher power densities (a ratio of the capacity of the dam to the area flooded) have lower emissions per kW h [99]. The type of terrain flooded in dam construction significantly impacts CO_{2-e} emissions, the more biomass present during dam inundation and the higher draw down zones, the higher emissions. Tropical and Amazonian reservoirs typically have the highest emissions [100]. Most greenhouse gas emissions from dams are methane from the anaerobic decomposition of biomass at depth and generally decrease with the age of the dam, as initial biomass stocks are decayed [100]. According to the IPCC [101], methane has a global warming potential 25 times higher than CO₂, over 100 years. Therefore, small changes in methane emissions will result in large changes to CO₂ equivalent emissions.

Geothermal emissions are most significantly impacted by technology choices. Waste gases are over 90% CO₂ by weight [37], so if directly released, emissions will be high. Most modern plants, however, either capture the CO₂ and produce dry ice, or reinject it back into the well [102].

2.3. Availability and technological limitations

Availability of renewable energy technologies and their limitations to produce base power are another limiting factor that needs assessing. It is known that Earth intercepts over 170 000 T W h/year from the sun [46], with irradiation varying greatly according to location and season. However, photovoltaics are currently limited by storage complications during nights and cloudy days when the sun cannot power the cells.

Wind also suffers from intermittency problems, however Edmonds et al. [31] suggest distributed capacity over a wide geographical area to alleviate fluctuations. Turbines must not operate when wind speeds are too high (>25 m/s) as turbine damage may result and will not turn when wind speeds are too low (<3 m/s) [62]. The IEA [103] estimate a global wind potential of 40 000 T W h/year.

Hydropower has the highest availability, reliability and flexibility of any technology [104]. Hydro plants can be started, stopped, or output rates changed within minutes. For this reason, where water resources are plentiful enough, hydropower can provide both base and peak load power. For the year 2005, hydropower provided 20% of the world's electricity demand with 2600 T W h and has a global economically feasible potential of over 8100 T W h/year [105].

Geothermal power is geographically limited to appropriate sites where the resource is present, however there are many such sites worldwide, spread over 24 countries with an operating potential of 57 T W h/year [106]. Geothermal is attractive for its ability to provide base load power 24 h a day. Extraction rates for power production will always be higher than refresh rates, reinjection helps restore the balance and significantly prolongs

Table 2
Efficiency of electricity generation

Photovoltaic	4–22%
Wind	24–54%
Hydro	>90%
Geothermal	10–20%
Coal	32–45%
Gas	45–53%

the lifetime of geothermal sites. The site of reinjection must be carefully selected to ensure short-circuiting does not occur. Reinjection also increases the frequency, but not severity of seismic activity [107].

2.4. Efficiency of energy generation

The range of efficiencies of energy generation technologies are summarised in Table 2 [24,30,42,50,57,67,74,77,78,81,85,88,92,108–128]. Hydropower has the highest efficiency of all electricity generating technologies currently available. Wind has the second highest efficiency, which is generally comparable to coal or gas. Photovoltaics and geothermal power have the lowest efficiencies, far less than other technologies.

Photovoltaic efficiency is highly variable due to the large range of cell types available, with an ideal cell efficiency of 30% [59]. Crystalline silicon cells (including multi- and poly-crystalline) have the highest efficiencies and amorphous silicon the lowest. Wind efficiency is also wide ranging due to the wide variation in quality of wind resources at different locations. A good wind resource, with location carefully selected will give greater than 40% efficiency. Geothermal values are low due to the low temperatures of the steam [67].

2.5. Land use

Photovoltaics and wind power have similar land use characteristics, with impacts from materials for unit manufacture and disposal/recycling. Neither requires any further mining footprint. Both are also characterised by the opportunity for dual use sites. Solar can be roof-mounted, providing a negligible footprint during use and wind can be incorporated into agricultural lands, reducing its share of the footprint. Gagnon et al. [15] give a total footprint of 72 km²/T W h for wind power, without allocating any share of this to agriculture. Similarly, Lackner and Sachs [46] find a photovoltaic land occupation of 28–64 km²/T W h with no dual purpose allocation.

Hydro footprints vary significantly, depending on local topography. A generic land requirement is given as 750 km²/T W h per year by Evrendilek and Ertekin [34], however Gagnon and van de Vate [80] give land requirements as low as 73 km²/T W h.

Geothermal power plants have relatively small surface footprints, with major elements located underground [106]. Due to the risk of land subsidence above the field, the whole geothermal field is used in the footprint calculation. A typical geothermal footprint is in the range 18–74 km²/T W h [106].

2.6. Water consumption

Accurate data quantifying water consumption during electricity generation is difficult to obtain, particularly for renewable energy technologies. As discussed by Inhaber [129], it is difficult to distinguish between water withdrawal (water that is taken, then returned to circulation) and water consumption (water removed from circulation outside the plant/unit). Water consumption seems to be a more accurate indicator of sustainability, since it

Table 3
Water consumption in kg per kW h of electricity generation

Photovoltaic	10
Wind	1
Hydro	36
Geothermal	12–300
Coal	78
Gas	78

is water ‘lost’ from circulation that will have an impact. A summary of water consumption values, as given by Inhaber [129] is shown in Table 3.

The storage dam is essential to large hydroelectricity plants. These dams withhold enormous volumes of water from surrounding areas. They also cause large water losses due to surface evaporation, the magnitude of which varies greatly according to dam size, volume per square meter and ambient temperatures [129]. However, this water may have naturally evaporated from rivers and lakes.

Geothermal power consumes large amounts of water required for cooling [130]. Water consumption can be controlled by the total reinjection of polluted and foul smelling wastewater, non-evaporative cooling, general pressure management and closed-loop recirculating cycles [50]. Both Inhaber [129] and Axtmann [131] concluded that geothermal plants produce more wastewater than thermal power plants, at up to 300 kg/kW h.

Water is also consumed in the production of photovoltaic modules and wind turbines, however little is used during operation and maintenance, giving very low life cycle water consumptions. Wind power has the lowest water consumption of the technologies considered, followed closely by photovoltaics.

2.7. Social impacts

There is a wide range of social impacts, both positive and negative, from the production of electricity. In some places, renewables offer the opportunity for electricity supply that otherwise may not exist. Many countries are less fortunate than Australia in their reserves of thermal fuels. Renewable technologies offer independence from fossil-fuel imports and price fluctuations. Impacts and their relative magnitudes for the technologies under consideration are summarised in Table 4.

Solar cells offer an attractive source of power without fuel dependence, the need for conventional power plants and reduced mining. The manufacture of solar cells involves several toxic, flammable and explosive chemicals. With constantly reducing mass requirements during cell manufacture due to thinner cells,

Table 4
Qualitative social impact assessment

Technology	Impact	Magnitude
Photovoltaic	Toxins Visual	Minor–major Minor
Wind	Bird strike Noise Visual	Minor Minor Minor
Hydro	Displacement Agricultural River Damage	Minor–major Minor–major Minor–major
Geothermal	Seismic activity Odour Pollution Noise	Minor Minor Minor–major Minor

Table 5
Sustainability rankings

	Photovoltaics	Wind	Hydro	Geothermal
Price	4	3	1	2
CO ₂ -e Emissions	3	1	2	4
Availability and limitations	4	2	1	3
Efficiency	4	2	1	3
Land use	1	3	4	2
Water consumption	2	1	3	4
Social impacts	2	1	4	3
Total	20	13	16	21

masses involved and hence risks are reduced however, all chemicals must be carefully handled to ensure minimal human and environmental contact. Solar farm locations must be carefully selected to reduce competition with agriculture, soil erosion and compaction.

Wind suffers from public outrage due to aesthetic degradation, noise and potential bird strike. Krohn and Damborg [132] found that public acceptance increased following local wind farm installation. Bird strike risk can be heavily mitigated by thorough research of the proposed site prior to installation. Noise is typically heavily masked by the noise of the wind itself.

The installation of hydropower is controversial. Rates of development of large hydro have slowed significantly following lack of public acceptance. Dam inundation usually results in the displacement of people and animals from the homes/habitats, the numbers affected can be very large. Agricultural pastures can also be affected either by direct inundation or loss of river and fertilising silt flow down river. However, hydro dams may also benefit communities due to improved flood control, access to irrigation water year round and recreational water sports.

Geothermal adversely affects communities where wastes are not properly managed as geothermal process waters are offensive smelling from hydrogen sulfide and contaminated with ammonia, mercury, radon, arsenic and boron. Geothermal fluids can be processed in a completely closed-loop system and then reinjected, mitigating these problems.

2.8. Ranking

Accounting for the selected sustainability indicators, each technology was ranked from 1 to 4 according to the corresponding indicator as shown in Table 5, with 1 being the best technology for that indicator. Where values were quantifiable, the average and range were considered together, as there was often significant overlap between values. Impact categories that are unable to be quantified, that is, availability and limitations as well as social impacts, were assessed qualitatively. In case of limitations, hydro was chosen as the least limited, due to its ability to provide base load power, flexibility of operation and number of suitable sites worldwide. Wind was considered the second best for similar reasons. Geothermal is slightly more limited worldwide, with less suitable locations. Solar is considered the most limited, since excess power during daylight hours is not yet able to be stored enough to provide adequate power during nights and on cloudy days. When social impacts were considered, wind was allocated the least negative social impacts, due to its benign nature. Solar was second, as careful management during manufacture and proper site selection mitigate its potential negative impacts. Geothermal placed third due to increased seismic activity and pollution potential. Hydro had the largest impact, primarily due to the large number of people and animals displaced during dam inundation.

The ranking in Table 5 suggests electricity production from wind is the most sustainable followed by hydropower. Geothermal was found to rank the lowest from the four non-combustion renewable energy technologies. It should be highlighted here that the ranking was provided for the global international conditions, while each technology can be significantly geographically affected. For a certain geographical location, some of the listed sustainability indicators may become more important than others.

3. Conclusions

The renewable energy technologies were assessed based on several critical sustainability indicators. The selected indicators were price of generated electricity, greenhouse gas emissions during the full life cycle of the technology, availability of renewable sources, efficiency of energy conversion, land requirements, water consumption and social impacts. Each indicator was assumed to have equal importance to sustainable development and used to rank the renewable energy technologies against their impacts. The ranking revealed that wind power is the most sustainable, followed by hydropower, photovoltaics and then geothermal. The relative ranking was provided using data collected from extensive range of literature and considers the global international conditions only.

References

- [1] IEA. International energy annual 2004. Energy Information Administration; 2006.
- [2] IEA. World energy outlook 2004. International Energy Agency; 2004.
- [3] Bilek M, Lenzen M, Hardy C, Dey C. Life-cycle energy and greenhouse gas emissions of nuclear power in Australia. The University of Sydney; 2006.
- [4] Hondo H. Life cycle GHG emission analysis of power generation systems: Japanese case. Energy 2005;30:2042–56.
- [5] Kato K, Murata A, Sakuta K. Energy pay-back time and life-cycle CO₂ emission of residential PV power system with silicon PV module. Progr Photovoltaics 1998;6:105–15.
- [6] Kammen DM, Pacca S. Assessing the costs of electricity. Annu Rev Environ Resour 2004;29:301–44.
- [7] Phylipsen GJM, Alsema EA. Environmental life-cycle assessment of multi-crystalline silicon solar cell modules. Department of Science, Technology and Society Utrecht University; 1995.
- [8] Vestas Wind Systems, A.S. Life cycle assessment of offshore and onshore sited wind power plants based on Vestas V90-3.0MW turbines; 2006.
- [9] Schleisner L. Life cycle assessment of a wind farm and related externalities. Renew Energy 2000;20:279–88.
- [10] Stewart GB, Pullin AS, Coles CF. Poor evidence-base for assessment of wind-farm impacts on birds. Environ Conserv 2007;34:1–11.
- [11] Clapp RW. Nuclear power and public health. Environ Health Perspect 2005;113:A720–1.
- [12] Brown VJ. Childhood leukemia in Germany: cluster identified near nuclear power plant (science selections). Environ Health Perspect 2007;115:A313.
- [13] Brown MT, Ulgiati S. Energy evaluations and environmental loading of electricity production systems. J Clean Product 2002;10:321–34.
- [14] Bergerson J, Lave L. A life cycle analysis of electricity generation technologies. Carnegie Mellon Electricity Industry Center; 2002.
- [15] Gagnon L, Belanger C, Uchiyama Y. Life-cycle assessment of electricity generation options: the status of research in year 2001. Energy Policy 2002;30:1267–78.
- [16] Chapman C, Ward S. Valuing the flexibility of alternative sources of power generation. Energy Policy 1996;24:129–36.
- [17] Denholm P, Kulcinski GL. Life cycle energy requirements and greenhouse gas emissions from large scale energy storage systems. Energy Convers Manage 2004;45:2153–72.
- [18] Uchiyama Y. Life cycle assessment of renewable energy generation technologies. IEEJ Trans Electr Electron Eng 2007;2:44–8.
- [19] Weissler D. A guide to life-cycle greenhouse gas (GHG) emissions from electric supply technologies. Energy 2007;32:1543–59.
- [20] Awerbuch S. Investing in photovoltaics: risk, accounting and the value of new technology. Energy Policy 2000;28:1023–35.
- [21] Cavallo A. Controllable and affordable utility-scale electricity from intermittent wind resources and compressed air energy storage (CAES). Energy 2007;32:120–7.
- [22] Charters WWS. Solar energy: current status and future prospects. Energy Policy 1991;19:738–41.
- [23] Cottrell A, Nunn J, Palfreyman D, Urfer A, Scaife P, Wibberley L. Systems assessment of future electricity generation options for Australia. CCSD tech-

- nology assessment report 32, Cooperative Research Centre for Coal in Sustainable Development, Brisbane, Australia; 2003.
- [24] DeCarolis J, Keith D. Is the answer to climate change blowing in the wind? In: Proceedings of the first international doctoral consortium on technology, policy, and management; 2002.
 - [25] DENA. German Energy Agency Dena study demonstrates that large scale integration of wind energy in the electricity system is technically and economically feasible; 2005.
 - [26] Denholm P. Improving the technical, environmental and social performance of wind energy systems using biomass-based energy storage. *Renew Energy* 2006;31:1355–70.
 - [27] Deutch JM, Deutch JM, Moniz EJ, Moniz EJ. The nuclear option. *Sci Am* 2006;295:76–83.
 - [28] Dincer I. Environmental impacts of energy. *Energy Policy* 1999;27:845–54.
 - [29] Drennen TE, Erickson JD, Chapman D. Solar power and climate change policy in developing countries. *Energy Policy* 1996;24:9–16.
 - [30] Dudhani S, Sinha AK, Inamdar SS. Renewable energy sources for peak load demand management in India. *Int J Electr Power Energy Syst* 2006;28:396–400.
 - [31] Edmonds J, Wise M, Dooley J, Kim S, Smith S, Runci P, et al. Global energy technology strategy—addressing climate change. Battelle Memorial Institute; 2007.
 - [32] El-Fadel M, Chedid R, Zeinani M, Hmaidan W. Mitigating energy-related GHG emissions through renewable energy. *Renew Energy* 2003;28:1257–76.
 - [33] El-Kordy MN, Badr KA, Ibrahim SMA. Economical evaluation of electricity generation considering externalities. *Renew Energy* 2002;25:317–28.
 - [34] Evrendilek F, Ertekin C. Assessing the potential of renewable energy sources in Turkey. *Renew Energy* 2003;28:2303–15.
 - [35] Fridleifsson IB, Freeston DH. Geothermal-energy research-and-development. *Geothermics* 1994;23:175–214.
 - [36] Gross R. Technologies and innovation for system change in the UK: status, prospects and system requirements of some leading renewable energy options. *Energy Policy* 2004;32:1905–19.
 - [37] Hammons TJ. Geothermal power generation worldwide: Global perspective, technology, field experience, and research and development. *Electr Power Compon Syst* 2004;32:529–53.
 - [38] Herbert GMJ, Iniyani S, Sreevalsan E, Rajapandian S. A review of wind energy technologies. *Renew Sustain Energy Rev* 2007;11:117–45.
 - [39] Hourri A. Prospects and challenges of using hydropower for electricity generation in Lebanon. *Renew Energy* 2006;31:1686–97.
 - [40] Idaho National Laboratory. Hydropower plant costs and production expenses. INL; 2005.
 - [41] IEA. Key world energy statistics. International Energy Agency; 2006.
 - [42] Ito M, Kato K, Sugihara H, Kichimi T, Song J, Kurokawa K. A preliminary study on potential for very large-scale photovoltaic power generation (VLS-PV) system in the Gobi desert from economic and environmental viewpoints. *Solar Energy Mater Solar Cells* 2003;75:507–17.
 - [43] Jager-Waldau A, Ossenbrink H. Progress of electricity from biomass, wind and photovoltaics in the European Union. *Renew Sustain Energy Rev* 2004;8:157–82.
 - [44] Kannan R, Leong KC, Osman R, Ho HK. Life cycle energy, emissions and cost inventory of power generation technologies in Singapore. *Renew Sustain Energy Rev* 2007;11:702–15.
 - [45] Koch FH. Hydropower—the politics of water and energy: introduction and overview. *Energy Policy* 2002;30:1207–13.
 - [46] Lackner KS, Sachs JD. A robust strategy for sustainable energy. *Brookings Pap Econ Activ* 2005;215–84.
 - [47] Lovseth J. the renewable energy potential of Norway and strategies for its development. *Renew Energy* 1995;6:207–14.
 - [48] MacLeod M, Moran D, Spencer I. Counting the cost of water use in hydro-electric generation in Scotland. *Energy Policy* 2006;34:2048–59.
 - [49] McGowan JG, Connors SR. Windpower: a turn of the century review. *Annu Rev Energy Environ* 2000;25:147–97.
 - [50] Mock JE, Tester JW, Wright PM. Geothermal energy from the earth: its potential impact as an environmentally sustainable resource. *Annu Rev Energy Environ* 1997;22:305–56.
 - [51] Moran D, Sherrington C. An economic assessment of windfarm power generation in Scotland including externalities. *Energy Policy* 2007;35:2811–25.
 - [52] Muneer T, Asif M, Munawwar S. Sustainable production of solar electricity with particular reference to the Indian economy. *Renew Sustain Energy Rev* 2005;9:444–73.
 - [53] Pacca S, Horvath A. Greenhouse gas emissions from building and operating electric power plants in the upper Colorado River Basin. *Environ Sci Technol* 2002;36:3194–200.
 - [54] Sanner B, Bussmann W. Current status, prospects and economic framework of geothermal power production in Germany. *Geothermics* 2003;32:429–38.
 - [55] Schumacher K, Sands RD. Innovative energy technologies and climate policy in Germany. *Energy Policy* 2006;34:3929–41.
 - [56] Sims REH. Electricity-generation from woody biomass fuels compared with other renewable energy options. *Renew Energy* 1994;5:852–6.
 - [57] Sims REH, Rogner HH, Gregory K. Carbon emission and mitigation cost comparisons between fossil fuel, nuclear and renewable energy resources for electricity generation. *Energy Policy* 2003;31:1315–26.
 - [58] Soderholm P, Ek K, Pettersson M. Wind power development in Sweden: global policies and local obstacles. *Renew Sustain Energy Rev* 2007;11:365–400.
 - [59] UNDP. World energy assessment energy and the challenge of sustainability. United Nations Development Program 2000.
 - [60] UNDP. World energy assessment 2004 update. United Nations Development Program 2004.
 - [61] van der Zwaan B, Rabl A. Prospects for PV: a learning curve analysis. *Solar Energy* 2003;74:19–31.
 - [62] WEC. 2007 survey of energy resources. World Energy Council; 2007.
 - [63] Wibberley L, Cottrell A, Palfreyman D, Scaife P, Brown P. Techno-economic assessment of power generation options for Australia. Technology assessment report 52; 2006.
 - [64] Alsema EA. Energy pay-back time and CO₂ emissions of PV systems. *Progr Photovoltaics* 2000;8:17–25.
 - [65] Balat M. Hydropower systems and hydropower potential in the European Union countries. Energy sources Part A—recovery utilization and environmental effects. 28;2006:965–78.
 - [66] IEA. Renewables in global energy supply. International Energy Agency; 2007.
 - [67] Barbier E. Geothermal energy technology and current status: an overview. *Renew Sustain Energy Rev* 2002;6:3–65.
 - [68] Alsema EA, Nieuwlaar E. Energy viability of photovoltaic systems. *Energy Policy* 2000;28:999–1010.
 - [69] Armannsson H, Fridriksson T, Kristjansson BR. CO₂ emissions from geothermal power plants and natural geothermal activity in Iceland. *Geothermics* 2005;34:286–96.
 - [70] Bertani R, Thain I. Geothermal power generating plant CO₂ emission survey. *IGA News* 2002;49:1–3.
 - [71] Fthenakis VM, Kim HC, Alsema E. Emissions from photovoltaic life cycles. *Environ Sci Technol* 2008;42:2168–74.
 - [72] Chatzimouratidis AI, Pilavachi PA. Objective and subjective evaluation of power plants and their non-radioactive emissions using the analytic hierarchy process. *Energy Policy* 2007;35:4027–38.
 - [73] Denholm P, Kulcinski GL, Holloway T. Emissions and energy efficiency assessment of baseload wind energy systems. *Environ Sci Technol* 2005;39:1903–11.
 - [74] Dones R, Frischknecht R. Life-cycle assessment of photovoltaic systems: results of Swiss studies on energy chains. *Progr Photovoltaics* 1998;6:17–25.
 - [75] Dones R, Heck T, Emmenegger MF, Jungbluth N. Life cycle inventories for the nuclear and natural gas energy systems, and examples of uncertainty analysis. *Int J Life Cycle Assess* 2005;10:10–23.
 - [76] Elsam Engineering AS. Life cycle assessment of onshore and offshore sites with power plants; 2004.
 - [77] Frankl P, Masini A, Gamberale M, Toccaceli D. Simplified life-cycle analysis of pv systems in buildings: present situation and future trends. *Progr Photovoltaics Res Appl* 1998;6:137–46.
 - [78] Fthenakis V, Alsema E. Photovoltaics energy payback times, greenhouse gas emissions and external costs: 2004—early 2005 status. *Progr Photovoltaics* 2006;14:275–80.
 - [79] Fthenakis VM, Kim HC. Greenhouse-gas emissions from solar electric and nuclear power: a life-cycle study. *Energy Policy* 2007;35:2549–57.
 - [80] Gagnon L, van de Vate JF. Greenhouse gas emissions from hydropower: the state of research in 1996. *Energy Policy* 1997;25:7–13.
 - [81] Greijer H, Karlson L, Lindquist SE, Hagfeldt A. Environmental aspects of electricity generation from a nanocrystalline dye sensitized solar cell system. *Renew Energy* 2001;23:27–39.
 - [82] Hunt TM. Five lectures on environmental effects of geothermal utilization. Geothermal training programme 2000, report 1. United Nations University; 2000.
 - [83] Komiya H, Yamada K, Inaba A, Kato K. Life cycle analysis of solar cell systems as a means to reduce atmospheric carbon dioxide emissions. *Energy Convers Manage* 1996;37:1247–52.
 - [84] Kreith F, Norton P, Brown D. A comparison of CO₂ emissions from fossil and solar power plants in the United States. *Energy* 1990;15:1181–98.
 - [85] Lenzen M, Munksgaard J. Energy and CO₂ life-cycle analyses of wind turbines—review and applications. *Renew Energy* 2002;26:339–62.
 - [86] Markandya A, Wilkinson P. Energy and health 2—electricity generation and health. *Lancet* 2007;370:979–90.
 - [87] Meier P. Life-cycle assessment of electricity generation systems and applications for climate change policy analysis. University of Wisconsin, Madison: College of Engineering; 2002.
 - [88] Meijer A, Huijbregts MAJ, Schermer JJ, Reijnders L. Life-cycle assessment of photovoltaic modules: comparison of mc-Si, InGaP and InGaP/mc-Si solar modules. *Progr Photovoltaics Res Appl* 2003;11:275–87.
 - [89] Nieuwlaar E, Alsema E, van Engelenburg B. Using life-cycle assessments for the environmental evaluation of greenhouse gas mitigation options. *Energy Convers Manage* 1996;37:831–6.
 - [90] Nomura N, Inaba A, Tonooka Y, Akai M. Life-cycle emission of oxidic gases from power-generation systems. *Appl Energy* 2001;68:215–27.
 - [91] Norton B. Renewable electricity—what is the true cost? *Power Eng J* 1999;13:6–12.
 - [92] Oliver M, Jackson T. The evolution of economic and environmental cost for crystalline silicon photovoltaics. *Energy Policy* 2000;28:1011–21.

- [93] Pacca S, Sivaraman D, Keoleian GA. Parameters affecting the life cycle performance of PV technologies and systems. *Energy Policy* 2007;35:3316–26.
- [94] Pehnt M. Dynamic life cycle assessment (LCA) of renewable energy technologies. *Renew Energy* 2006;31:55–71.
- [95] Proops JLR, Gay PW, Speck S, Schroder T. The lifetime pollution implications of various types of electricity generation—an input–output analysis. *Energy Policy* 1996;24:229–37.
- [96] Spadaro J, Langlois L, Hamilton B. Assessing the difference: greenhouse gas emissions of different electricity generating chains. *IAEA Bull* 2000;42:19–24.
- [97] Voorspools KR, Brouwers EA, D'Haeseleer WD. Energy content and indirect greenhouse gas emissions embedded in 'emission-free' power plants: results for the low countries. *Appl Energy* 2000;67:307–30.
- [98] ABARE. Australian energy projections 2007; 2007.
- [99] dos Santos MA, Rosa LP, Sikar B, Sikar E, dos Santos EO. Gross greenhouse gas fluxes from hydro-power reservoir compared to thermo-power plants. *Energy Policy* 2006;34:481–8.
- [100] Abril G, Guerin F, Richard S, Delmas R, Galy-Lacaux C, Gosse P, et al. Carbon dioxide and methane emissions and the carbon budget of a 10-year old tropical reservoir. *Global biogeochemical cycles*, vol. 19. French Guiana: Petit Saut; 2005.
- [101] Forster PV, Ramaswamy P, Artaxo T, Bernsten R, Betts DW, Fahey J, et al. Changes in atmospheric constituents and in radiative forcing. In: *Climate change 2007: the physical science basis. Contribution of working group I to the fourth assessment report of the intergovernmental panel on climate change*. Intergovernmental panel on climate change; 2007.
- [102] Huttner GW. The status of world geothermal power generation 1995–2000. *Geothermics* 2001;30:1–27.
- [103] IEA. The potential of wind energy to reduce CO₂ emissions. International energy agency greenhouse gas R&D programme. International Energy Agency 2000;Paris.
- [104] Egge D, Milewski JC. The diversity of hydropower projects. *Energy Policy* 2002;30:1225–30.
- [105] Balat M. Current geothermal energy potential in Turkey and use of geothermal energy. *Energy sources Part B—economics planning and policy*. 1:2006;55–65.
- [106] Bertani R. World geothermal power generation in the period 2001–2005. *Geothermics* 2005;34:651–90.
- [107] Rybach L. Geothermal energy: sustainability and the environment. *Geothermics* 2003;32:463–70.
- [108] Bartle A. Hydropower potential and development activities. *Energy Policy* 2002;30:1231–9.
- [109] Andersson BA, Jacobsson S. Monitoring and assessing technology choice: the case of solar cells. *Energy Policy* 2000;28:1037–49.
- [110] Chopra KL, Paulson PD, Dutta V. Thin-film solar cells: an overview. *Progr Photovoltaics Res Appl* 2004;12:69–92.
- [111] de Wild-Scholten MJ, Alsema EA. In: *Environmental life cycle inventory of crystalline silicon photovoltaic module production—proceedings of the materials research society fall 2005 meeting symposium G*; 2006.
- [112] DiPippo R. Ideal thermal efficiency for geothermal binary plants. *Geothermics* 2007;36:276–85.
- [113] Fthenakis VM, Moskowitz PD. Photovoltaics: environmental, health and safety issues and perspectives. *Progr Photovoltaics Res Appl* 2000;8:27–38.
- [114] Granovskii M, Dincer I, Rosen MA. Greenhouse gas emissions reduction by use of wind and solar energies for hydrogen and electricity production: economic factors. *Int J Hydrogen Energy* 2007;32:927–31.
- [115] Green MA. Photovoltaics: technology overview. *Energy Policy* 2000;28:989–98.
- [116] Green MA. Price/efficiency correlations for 2004 photovoltaic modules. *Progr Photovoltaics* 2005;13:85–7.
- [117] Green MA, Emery K, King DL, Hishikawa Y, Warta W. Solar cell efficiency tables (version 29). *Progr Photovoltaics* 2007;15:35–40.
- [118] Gurzenich D, Wagner HJ. Cumulative energy demand and cumulative emissions of photovoltaics production in Europe. *Energy* 2004;29:2297–303.
- [119] Hegedus S. Thin film solar modules: the low cost, high throughput and versatile alternate to Si wafers. *Progr Photovoltaics Res Appl* 2006;14:393–411.
- [120] Hepbasli A. Current status of geothermal energy applications in Turkey. *Energy Sources* 2003;25:667–77.
- [121] Jungbluth N, Bauer C, Dones R, Frischknecht R. Life cycle assessment for emerging technologies: case studies for photovoltaic and wind power. *Int J Life Cycle Assess* 2005;10:24–34.
- [122] Kanoglu M. Exergy analysis of a dual-level binary geothermal power plant. *Geothermics* 2005;31:709–24.
- [123] Mason JE, Fthenakis VM, Hansen T, Kim HC. Energy payback and life-cycle CO₂ emissions of the BOS in an optimized 3.5 MW PV installation. *Progr Photovoltaics Res Appl* 2006;14:179–90.
- [124] Mohr NJ, Schermer JJJHMA, Meijer A, Reijnders L. Life cycle assessment of thin-film GaAs and GaInP/GaAs solar modules. *Progr Photovoltaics Res Appl* 2007;15:163–79.
- [125] Treble F. Milestones in the development of crystalline silicon solar cells. *Renew Energy* 1998;15:473–8.
- [126] Tripanagnostopoulos YMS, Battisti R, Corrado A. Energy, cost and LCA results of PV and hybrid PV/T solar systems. *Progr Photovoltaics Res Appl* 2005;13:235–50.
- [127] Watt ME, Johnson AJ, Ellis M, Outhred HR. Life-cycle air emissions from PV power systems. *Progr Photovoltaics* 1998;6:127–36.
- [128] Yang H, Wang H, Yu H, Xi J, Cui R, Chen G. Status of photovoltaic industry in China. *Energy Policy* 2003;31:703–7.
- [129] Inhaber H. Water use in renewable and conventional electricity production. *Energy Sources* 2004;26:309–22.
- [130] Abbasi SA, Abbasi N. Likely adverse environmental impacts of renewable energy sources. *Appl Energy* 2000;65:121–44.
- [131] Axtmann RC. Environmental impact of a geothermal power plant. *Science* 1975;187:795–803.
- [132] Krohn S, Damborg S. On public attitudes towards wind power. *Renew Energy* 1999;16:954–60.